



SILVER DYNAMIC AGM

Key benefits



Made in Germany in the world's largest AGM production plant



Patented PowerFrame® grid for reliable starting power, fast recharge and corrosion resistance



Meets all original criteria of the car manufacturer



Suitable for all vehicles with start-stop system – kicks in earlier, works harder, lasts longer (part of OE design ensuring highest fuel savings in start-stop system)

■ 3 times the cycle life compared to conventional VARTA batteries

For more information visit www.varta-automotive.com


ORDER INFORMATION

European Type No. (ETN):	560 901 068
Article Number:	560 901 068 D85 2
Short Code:	D52
Barcode:	4016987144497
UK Code:	027AGM
Packaging Unit:	1
Quantity per Pallet:	57


TECHNICAL INFORMATION

Voltage [V]:	12	Base Hold-down:	B13
Battery Capacity [Ah]:	60	Layout:	0
Cold Cranking Amps (CCA), EN [A]:	680	Terminal Types:	1
Length [mm]:	242	Case Size:	H5/LN2
Width [mm]:	175	Weight filled (kg):	17,5
Height [mm]:	190		

B13




0



THE CONSTRUCTION OF VARTA SILVER DYNAMIC BATTERIES WITH AGM TECHNOLOGY

- Constructed with advanced Absorbent Glass Mat (AGM) technology
- AGM technology prevents corrosion due to acid stratification
- Highest performance, extreme cycle life and spill-proof
- Electrolyte held in the glass fleece separator exerts a uniformly high contact pressure

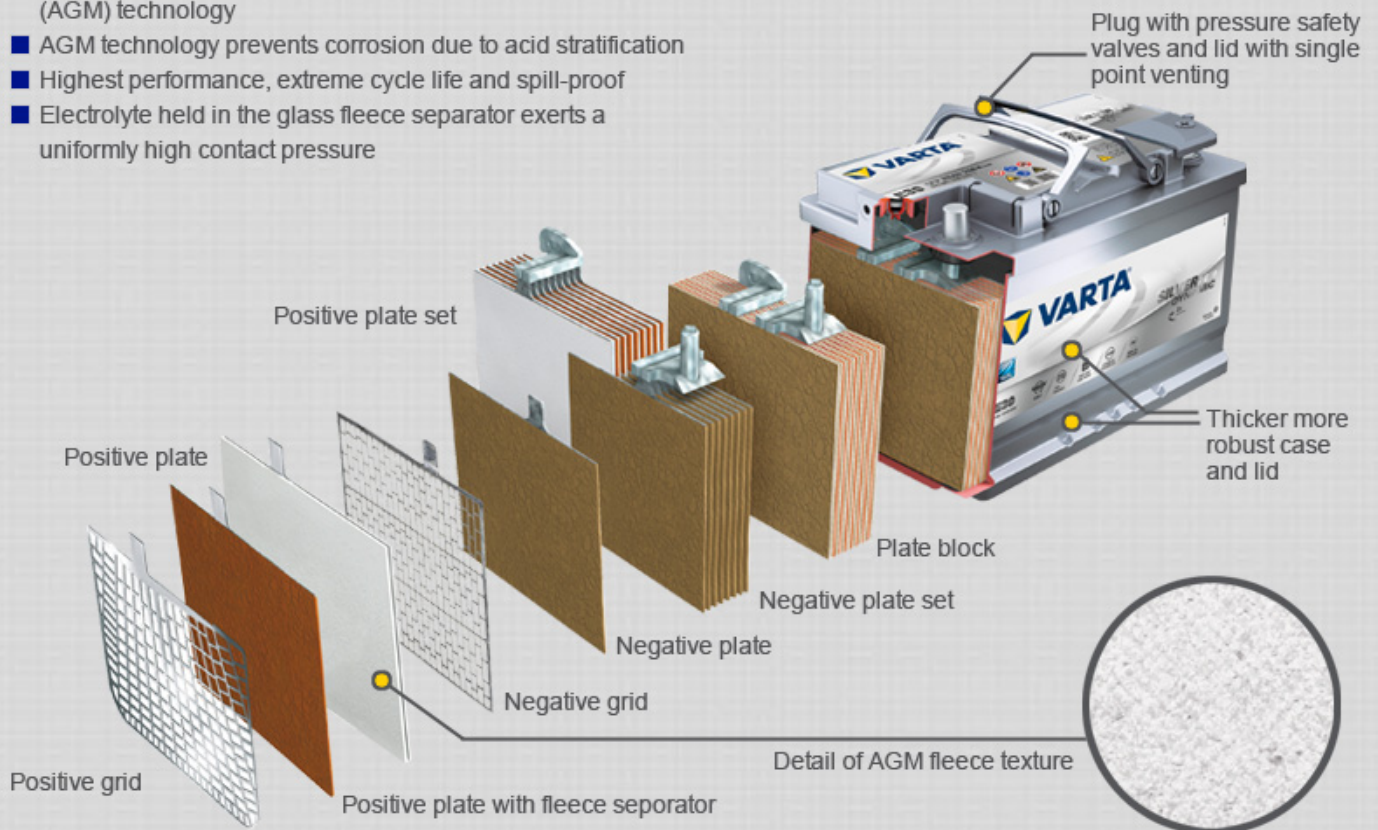



Features	<i>SILVER dynamic AGM</i>	<i>BLUE dynamic EFB</i>
Number of battery types	5 Types	5 Types
Primary function	Advanced Start-Stop functionality	Ensures Start-Stop functionality
Cold cranking power	CCA 135 %	CCA 115 %
Battery technology	AGM – Absorbent Glass Mat	EFB – Enhanced Flooded battery
Positive grid / Negative grid	PowerFrame® / Casted grid	PowerFrame® / Expanded grid
OE quality	Meets OE requirements	Meets OE requirements
Cycling endurance	3x higher*	2x higher*
Capability of deep discharge	High*	Middle*

*Compared to conventional batteries